




PRODUCT DATA SHEET:

SECTION 32 17 26 – TACTILE WARNING SURFACING DETECTABLE WARNING SURFACE PANELS CAST-IN-PLACE PAVER

Manufacturer:

ADA Solutions, a Division of SureWerx USA Inc.
323 Andover Street, Suite 3
Wilmington, MA 01887
Phone: 800-372-0519
Fax: 978-262-9125
Web: adatile.com

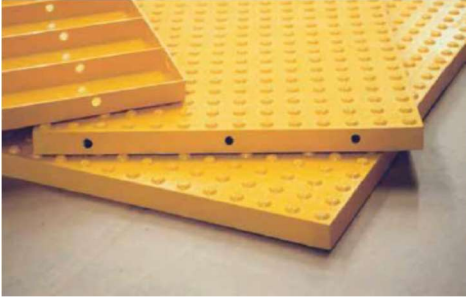

Description: Cast-In-Place Paver Detectable Warning Surface Panels (CIP Paver) with an in-line truncated dome pattern embedded in concrete at pedestrian crossings, boarding platforms, and rail crossing locations.

Compliance: CIP Paver panels are compliant with the following guidelines and requirements:

- American Barriers Act (ABA) Accessibility Standards
- ADA Accessibility Guidelines (ADAAG)
- Department of Transportation ADA Standards for Transportation Facilities (2006)
- Department of Justice ADA Standards (2010)
- Public Rights-of-Way Accessibility Guidelines (PROWAG)
- California Building Standards Code, Title 24, California Code of Regulations
- Texas Accessibility Standards (TAS) 2012
- AASHTO M 333 Standard Specification for Detectable Warning Surfaces
- International Code Council (ICC) A117.1 Accessible and Usable Buildings and Facilities

Material: CIP Paver panels are manufactured using a matte finish exterior grade homogeneous (uniform color throughout thickness of product) glass and carbon reinforced polyester-based sheet molding compound (SMC) composite material.

Warranty: Guaranteed in writing for a period of seven (7) years from date of Contract's final completion. The guarantee includes manufacturing defects, breakage, and deformation.

Panel Sizes:

24" x 36" (609.6 x 914.4 mm)
24" x 48" (609.6 x 1219.2 mm)
24" x 60" (609.6 x 1524.0 mm)
36" x 48" (914.4 x 1219.2 mm)
36" x 60" (914.4 x 1524.0 mm)

Colors: Color shall be single, homogeneous color throughout panel

- Federal Yellow FS No. 33538
- Brick Red FS No. 20109
- Clay Red FS No. 22144
- Safety Red FS No. 31350
- Black FS No. 37038
- Dark Gray FS No. 36118
- Safety Blue FS No. 15187
- White FS No 27925
- Seattle Yellow FS No 23594

Domes: Raised truncated domes of 0.2" (5.0 mm) nominal height, base diameter of 0.9" (22.8 mm) and top diameter of 0.45" (11.4 mm).

Dome Spacing: CIP Paver panels have 2.35" (59.6 mm) or 2.4" (60.9 mm) dome spacing in square grid pattern. ADA Standards and Public Rights-of-Way Accessibility Guidelines require truncated dome spacing range of 1.6"-2.4" (40.6-60.9 mm).

Anchoring: Panels feature structural embedment ribs on the reverse side of the panel located at 3" (76.2 mm) on center. The ribs provide structural support to the panel surface and secure the panel permanently into the cured concrete substrate.

Installation: CIP Paver panels are wet set into a minimum 2 ½" (63.5 mm) depth of concrete (4"-7" slump). Panels are pressed into the wet concrete and tamped or vibrated to ensure that there are no voids or air pockets. Field level of the panel is to be flush to the adjacent concrete surface.

Cutting: CIP paver panels can be cut to size using a 60-tooth carbide blade on a table saw or equivalent cutting device.

PRODUCT DATA SHEET:

SECTION 32 17 26 – TACTILE WARNING SURFACING
DETECTABLE WARNING SURFACE PANELS
CAST-IN-PLACE PAVER

Product Testing and Physical Properties:

Standard	Standard Description	Value
ASTM D695	Compressive Strength	28,900 psi minimum
ASTM D790	Flexural Strength	29,300 psi minimum
ASTM D 638	Tensile Strength	11,600 psi minimum
ASTM C 1028	Standard Test Method for Determining the Static Coefficient of Friction (Slip Resistance)	1.18 Dry / 1.05 Wet
AS HB198:2014 (AS/NZS 4586)	Pendulum Sustainable Slip Resistance (SSR)	Pendulum Test Value (PTV), with Four S (96) hard rubber slider: 56 Dry / 44 Wet; After 500 cycles of abrasion: 34 Wet
ASTM C501	Abrasion Resistance	Minimum 500
FM 5-594	Abrasion Resistance, Florida Method	Average Volume Loss: no more than 0.03 cm ³
NTPEP TP103 (2015)	High Temperature Thermal Cycling Exposure, (Sect 14) and Resistance to Impact from Falling Tup (Sect 10)	Min. 60 thermal cycles at 200°F (93.33°C) = maximum damage classification of 'C' at 20 ft-lb impact
ASTM G155	Accelerated Weathering	$\Delta E < 5.0$ at 2,000 hours min.
ASTM D570	Water Absorption	0.07%
ASTM C1026	Freeze/Thaw/Heat	No deterioration
ASTM D1037	Freeze/Thaw	No deterioration
ASTM D543	Chemical Stain Resistance	No reaction
ASTM D1308	Chemical Stain Resistance	No reaction
ASTM-B117	Salt and Spray	No change after 200 hours
ASTM E84	Flame Spread Index	20
AASHTO H20	Load Bearing Test	No Damage at 16,000 lbs.