



TOP VIEW

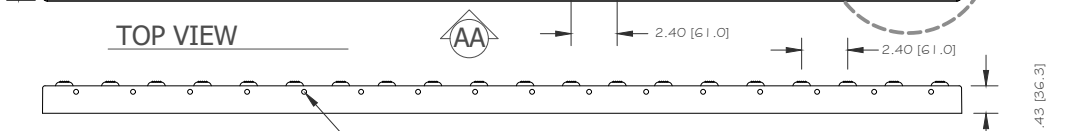


AA SIDE VIEW


0.25" [6.35] DIAMETER VENT HOLES CENTERED BETWEEN EMBEDMENT RIBS TO ALLOW AIR TO ESCAPE FROM CAVITIES DURING INSTALLATION INTO UNCURED CONCRETE.

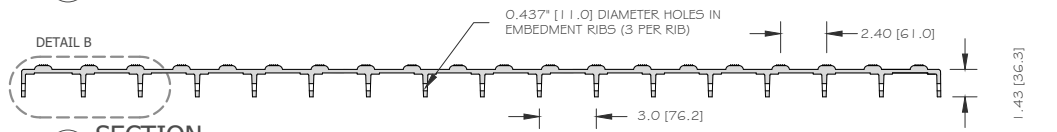


CC SECTION

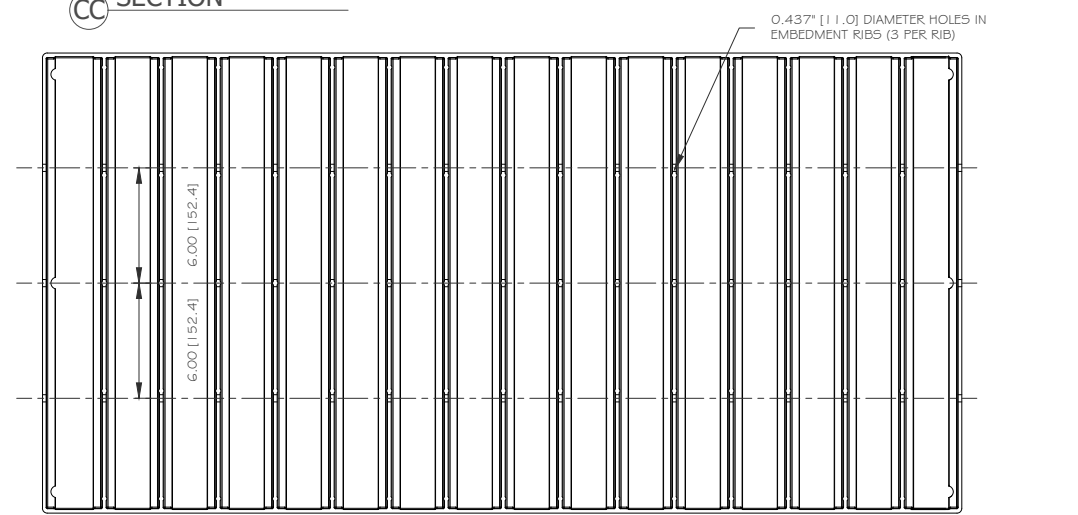


BOTTOM VIEW

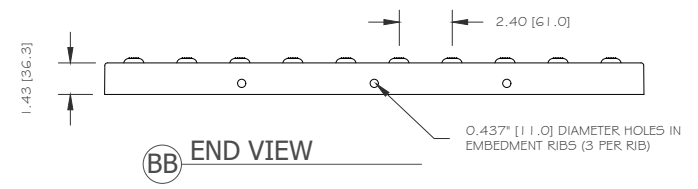

BB END VIEW

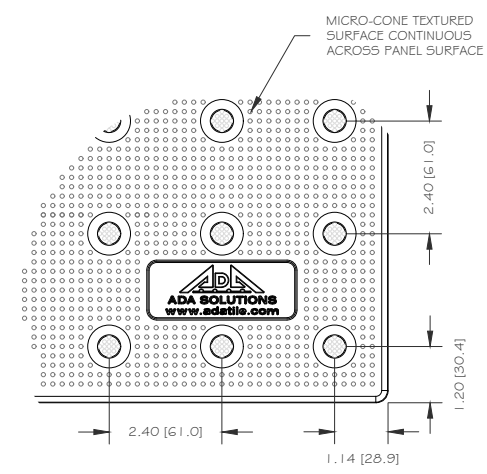

A DETAIL

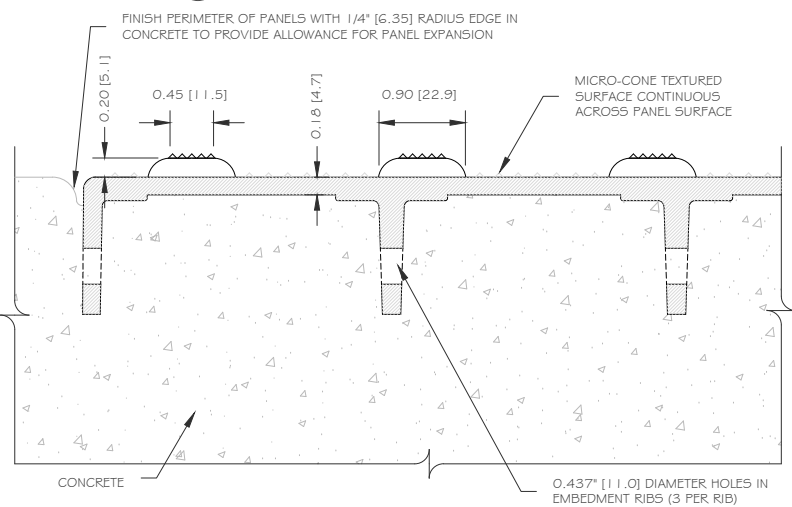


B DETAIL - INSTALLED IN CONCRETE

DETECTABLE WARNING SURFACE PANEL  
**Cast-In-Place Paver Panel 24" x 48"**  
 PART SIZE: 24" (609.6 MM) X 47.875" (1,216.0 MM)  
 2.40" (60.96 MM) IN-LINE TRUNCATED DOME SPACING


DIVISION  
TACTILE WALKING SURFACE INDICATORS  
 MATERIAL  
FIBERGLASS REINFORCED POLYMER COMPOSITE SMC  
 DRAWING NUMBER  
ADA-PAVER-2448 Page 1 of 2  
 DATE  
2023-08-10  
 DRAWING UNITS  
INCHES [MM]

WEBSITE  
ADATILE.COM  
 PHONE  
1-800-372-0519  
 EMAIL  
INFO@ADATILE.COM




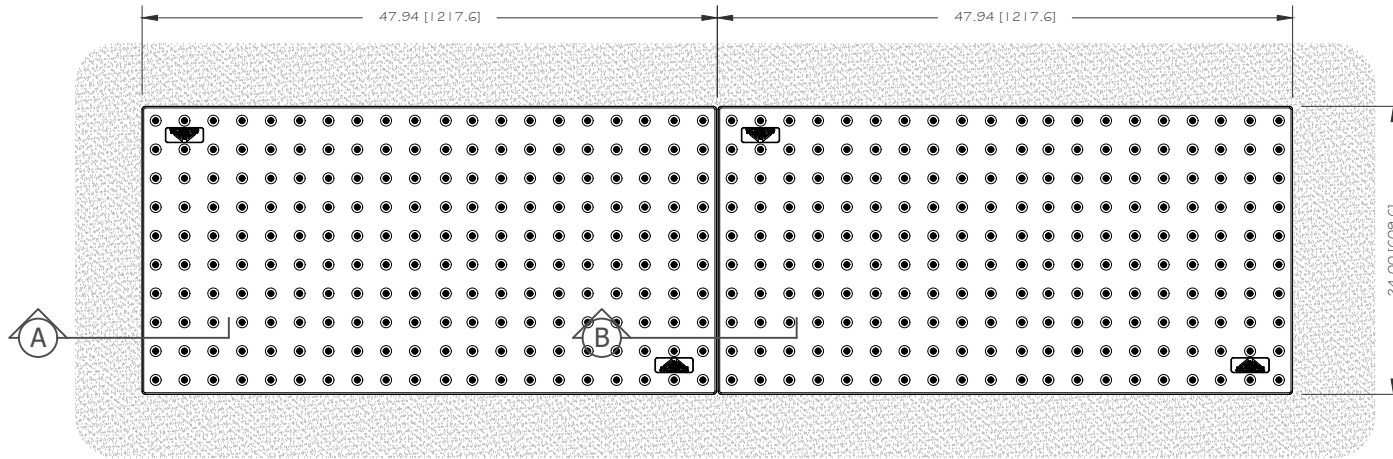

TOP VIEW - MULTIPLE PANEL INSTALLATION

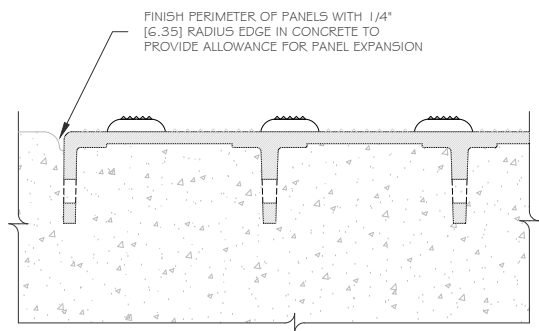

**A** PERIMETER EMBEDMENT DETAIL

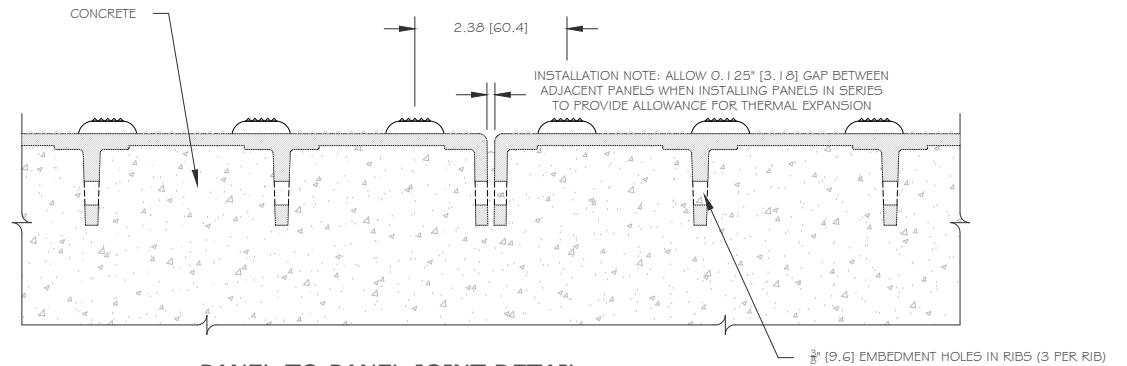

**B** PANEL-TO-PANEL JOINT DETAIL

DETECTABLE WARNING SURFACE PANEL  
**Cast-In-Place Paver Panel 24" x 48"**  
 PART SIZE: 24" (609.6 MM) X 47.875" (1,216.0 MM)  
 2.40" (60.96 MM) IN-LINE TRUNCATED DOME SPACING

DIVISION  
 TACTILE WALKING SURFACE INDICATORS

MATERIAL  
 FIBERGLASS REINFORCED POLYMER COMPOSITE SMC

DRAWING NUMBER  
 ADA-PAVER-2448 Page 2 of 2

DATE  
 2023-08-10

DRAWING UNITS  
 INCHES [MM]

WEBSITE  
 ADATILE.COM

PHONE  
 1-800-372-0519

EMAIL  
 INFO@ADATILE.COM

